

Form PTO-1390
(REV 10-97)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

20251-000100US

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5)

09/674444

INTERNATIONAL APPLICATION NO.

PCT/GB99/01339

INTERNATIONAL FILING DATE

29 April 1999

PRIORITY DATE CLAIMED

1 May 1998

TITLE OF INVENTION

JITTER MEASUREMENT

APPLICANT(S) FOR DO/EO/US

WANDEL & GOLTERMANN et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
 - ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States receiving Office (RO/US)
 - ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments as to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) - **UNEXECUTED**
10. ☐ A translation of the annexes to the International Preliminary examination Report under PCT Article 36 (35 U.S.C. 371(c)(5))

Items 11. to 16. below, concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
 - ☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: A copy of the International Preliminary Examination Report

U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5) <div style="font-size: 1.5em; font-weight: bold;">09/ 674 444</div>		INTERNATIONAL APPLICATION NO. PCT/GB97/02771		ATTORNEY'S DOCKET NUMBER 20251-000100US	
17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO 840.00 International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) 670.00 No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but international search fee paid to USPTO (37 C.F.R. 1.445(a)(2)) 760.00 Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO 970.00 International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) 96.00 <div style="text-align: right; font-weight: bold;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>				CALCULATIONS PTO USE ONLY	
				\$ 840.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	15-20=		x \$18.00	\$	
Independent Claims	3-3=		x \$78.00	\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 C.F.R. 1.9, 1.27, 1.28).				\$	
SUBTOTAL =				\$ 840.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 C.F.R. 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$ 840.00	
Fee for recording the enclosed assignment (37 C.F.R. 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property +				\$	
TOTAL FEES ENCLOSED =				\$	
				Amount to be refunded:	\$
				charged	\$ 840.00
a. <input type="checkbox"/> A check in the amount of \$_____ to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. 20-1430 in the amount of <u>\$ 840.00</u> to cover the above fees. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 20-1430. A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: Darin J. Gibby Townsend and Townsend and Crew LLP Two Embarcadero Center, 8th Floor San Francisco, CA 94111			<div style="font-size: 1.5em; font-weight: bold;">SIGNATURE</div> <div style="text-align: center;">Darin J. Gibby</div> <div style="text-align: center;">NAME</div> <div style="text-align: center;">38,464</div> <div style="text-align: center;">REGISTRATION NUMBER</div>		

IN THE UNITED STATES DESIGNATED OFFICE (DO/EO/US)

IN RE APPLICATION OF:

WANDEL & GOLTERMANN et al.

International No.: PCT/GB99/01339

International Filing Date: 29 April 1999

Priority Filing Date: 1 May 1998

FOR: JITTER MEASUREMENT

BOX PCT

Assistant Commissioner for Patents

Washington, D.C. 20231

Sir:

CERTIFICATE OF EXPRESS MAILING

"Express Mail" Mailing Label No. EF337223551US

Date of Deposit: October 31, 2000


I hereby certify that the following attached items:

1. Transmittal Letter and 1 copy
2. Copy of International application as published by WIPO (WO 99/57842), including International Search Report
3. Copies of PCT Request (PCT/RO/101)
4. Copies of Forms PCT/RO/105 and PCT/IB 301, 304 and 308
5. Copy of PCT Demand for International Preliminary Examination
6. Copy of International Preliminary Examination Report

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, Box PCT, Washington, D.C. 20231

Connie Larson

Type or print name of person depositing


Signature of person depositing

CERTIFICATE OF EXPRESS MAILING

Express Mail® Mailing Label No. EF337223551US

Date of Deposit: 31 October 2000

I hereby certify that the attached papers are being deposited with the United States Postal Service
"Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above
and is addressed to the Assistant Commissioner for Patents, Box PCT, Washington, DC 20231.

Type or print name of person depositing: Connie Larson

Signature of person depositing: Connie Larson

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
AS RECEIVING OFFICE FOR THE PATENT COOPERATION TREATY**

In re Application of)
)
WANDEL & GOLTERMANN et al.)
)
Serial No.: PCT/GB99/01339)
)
Filed: 29 April 1999)
)
For: JITTER MEASUREMENT)
)
File No.: 20251-000100US)

PRELIMINARY AMENDMENT

Commissioner of Patents
and Trademarks
Box PCT
Washington, DC 20231

Dear Sir:

Prior to examination, please amend the claims as follows:

IN THE CLAIMS:

(All claims are set forth for convenient reference.)

1. (Amended) A method of measuring jitter in a digital signal comprising:
forming an offset reference clock signal [(101, 201, 103),] being offset by a
predetermined frequency amount from said digital signal;

sampling [(110)] said digital signal at sampling times determined by said offset reference clock signal, such that, in the absence of jitter and said offset by a predetermined frequency, there are a predetermined number of sampling times in each bit of said digital signal;

detecting [(113, 114)] occasions when the number of sampling times in any bit of said digital signal is different from said predetermined number;

counting [(119)] said occasions over a predetermined time, and

deriving [(121)] at least one measure of jitter from said counting of said occasions.

2. (Amended) A method according to claim 1, wherein said offset reference clock signal is formed by extracting [(101)] a clock signal from said digital signal and offsetting [(102)] said clock signal by said predetermined frequency.

3. (Amended) A method according to claim 2, further including smoothing [(103)] said offset reference clock signal.

4. (Amended) A method according to **[any one of said preceding claims]** claim 1, wherein said sampling times are determined by an integer multiple of the frequency of said offset reference clock signal.

5. A method according to claim 4, wherein said sampling the times are at clock bit intervals being plus and minus one of said integer multiple.

6. (Amended) A method according to **[any one of the preceding claims]** claim 1, wherein the predetermined item is inversely proportional to the product of the bit rate of the digital signal and the predetermined frequency amount.

7. (Amended) A method according to **[any one of the preceding claims]** claim 1, wherein one of said at least one measure of jitter is obtained by counting up one value for each of said occasions representing sampling times greater than the predetermined number within a bit, counting down one value for each of said occasions representing sampling times less than the

predetermined number within a bit and determining the difference between the maximum count value and the minimum count value.

8. (Amended) A method according to **[any one of the preceding claims]** claim 4, wherein one of said at least one measure of jitter is obtained by counting up one value for each of said occasions representing sampling times greater than the predetermined number within a bit, counting down one value for each of said occasions representing sampling times less than the predetermined number within a bit and determining the time difference between the first occasion of the maximum count value and the last occasion of the minimum count value.

9. (Amended) A method according to claim 8 **[as dependent on claim 4]**, wherein the time difference is divided by said integer multiple and said predetermined time.

10. (Amended) An apparatus for measuring jitter in a digital signal comprising:
means **[(101, 102 and 103)]** for forming an offset reference clock signal, which clock signal is offset by a predetermined frequency amount from said digital signal;
means **[(110)]** for sampling said digital signal at sampling times determined by said offset reference clock signal, such that, in the absence of jitter and said offset by a predetermined frequency, there are a predetermined number of sampling items in each bit of said digital signal;
means **[(112, 114)]** for detecting occasions when the number of sampling times in any bit of said digital signal is different from said predetermined number; and
means **[(119)]** for counting said occasions over a predetermined time, and
means **[(121)]** for deriving at least one measure of jitter from said means for counting of said occasions.

11. (Amended) An apparatus according to claim 10, wherein said means for forming said offset reference clock signal comprises means **[(102)]** for extracting a clock signal from said digital signal and means **[(102)]** for offsetting the clock signal by said predetermined frequency.

12. (Amended) An apparatus according to claim 11, wherein said means for forming said offset reference clock signal includes means **[(103)]** for smoothing said offset reference clock signal.

13. (Amended) An apparatus according to **[any one of claims 10 to 12]** claim 10, wherein said means **[(121)]** for deriving one of said at least one measure of jitter comprises means for counting up one value for each of said occasions representing sampling times greater than said predetermined number within a bit and for counting down one value for each of said occasions representing sampling times less than the predetermined number within a bit and means for determining the difference between the maximum count value and the minimum count value.

14. (Amended) An apparatus according to any one of claims 10 to 12, wherein said means **[(101)]** for deriving one of said at least one measure of jitter comprises means for counting up one value for each of said occasions representing sampling times greater than the predetermined number within a bit and for counting down one value for each of said occasions representing sampling times less than the predetermined number within a bit and means for determining the time difference between the first occasions of the maximum count value and the last occasion of the minimum count value.


15. An apparatus for measuring jitter in a digital signal comprising:
an offset unit **[(101, 102, 103)]** arranged to form an offset reference clock signal, being offset by a predetermined frequency amount from said digital signal;
a sampler **[(110)]** arranged to sample said digital signal at sampling times determined by said offset reference clock signal such that, in the absence of jitter and said offset by a predetermined frequency, there are a predetermined number of sampling times in each bit of said digital signal;
at least one detector **[(113, 114)]** arranged to detect occasions when the number of sampling items in any bit of said digital signal is different from said predetermined number;
a counter **[(119)]** arranged to count said occasions over a predetermined time, and

an analyzer [(121)] arranged to derive at least one measure of jitter from said counting of said occasions.

REMARKS

Claims 1-4 and 6-15 have been amended to conform with U.S. practice. Examination of the claims, as amended, is respectfully requested.

Respectfully submitted,

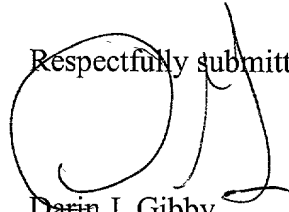

Darin J. Gibby
Reg. No. 38,464

TOWNSEND AND TOWNSEND AND CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, California 94111-3834
Tele: (303) 571-4000
Fax: (303) 571-4321

DE 7026261 v1

09/674444

WO 99/57842

PCT/GB99/01339

1 526 Rec'd PCT/TO 31 OCT 2000

JITTER MEASUREMENTBACKGROUND OF THE INVENTIONFIELD OF THE INVENTION

The present invention relates to the measurement of
5 jitter in a digital signal. In theory, the spacing of
the transitions between levels of a digital signal have a
completely uniform spacing. In practice, particularly
during transmission, there may be minute variations in
the actual time of the transition, relative to the
10 theoretical transition time defined by an absolute
reference clock. These variations are referred to as
jitter, and may be considered to be a spurious phase
modulation of the signal.

SUMMARY OF THE PRIOR ART

15 Known systems for measuring jitter involve a very
stable phase-locked loop which compares the pulse train
containing jitter with an internally generated, jitter-
free reference clock. The phase-locked loop has a
generator for generating the reference clock, the output
20 of which is fed to the input of a phase demodulator which
also receives a digital signal containing jitter. The
phase demodulator converts the signal to pulse duration
modulation, which is output to a low pass filter, the
output of which gives the jitter measurement, and also is
25 fed back to the input of the reference clock generator,
to form the loop. The low pass filter has cut off

WO 99/57842

PCT/GB99/01339

2

frequency of 5-10% of the bit rate. But since the digital signal being investigated may contain long sequences of digital zeros, a pattern/clock converter may be used to convert the digital signal into a continuous pulse train with the same jitter as the original signal, which pulse train then forms the input to the phase demodulator. Analysis of the output may involve peak value rectification before the results are displayed, and/or analysis with a spectrum analyser.

As mentioned above, such a jitter measurement system involves a low pass filter, and this has a significant influence on the greatest measurable jitter frequency component. The known systems also involve many analog circuits, which are more expensive than digital components.

SUMMARY OF THE INVENTION

Therefore, the present invention seeks to provide a system for measuring jitter in a digital signal, in which a clock signal is extracted from the original digital signal, offset by a predetermined frequency, and smoothed to eliminate jitter therefrom. This gives an offset reference clock signal which is then used to sample the original input signal. Preferably, that offset clock signal is frequency multiplied by an integer factor before it is used for timing the sampling.

The effect of the offset of the reference clock

WO 99/57842

PCT/GB99/01339

3

signal is that the sampling point is not fixed relative to the transition point over the bits of the input signal, but instead moves relative thereto. The sampling points are then arranged such that, in the absence of the offset and in the absence of jitter, there is a predetermined number of sampling points (normally only one, but this is not essential) in each successive bit. The present invention then proposes that the occasions when a bit of said digital signal contains other than the predetermined number of sampling points are detected. The occasions when the number of sampling points differs from the predetermined number occur because of the offset of the clock, but also due to jitter when the sampling point approaches the theoretical (absolute) transition point of the bits, being the transition point that would occur in the absence of jitter. The count of the number of occasions a bit has more sampling points than the predetermined number for a suitable measuring duration then gives a measure of the jitter.

Note that a bit may have more samplings than the predetermined number and a later bit may have fewer samplings than the predetermined number and both are occasions to be counted. For simplicity, the number of samplings per bit in the absence of offset and jitter is preferably one. Then, a count is made of the occasions there are either two sampling times within a bit on no

WO 99/57842

PCT/GB99/01339

4

sampling times within a bit. It would also be possible to have more than one sampling time within a bit in the absence of offset and jitter, e.g. 2. Then the number of occasions of 3 or 1 sampling times in a bit would be

5 counted.

The measurement period is preferably inversely proportional to the product of the bit rate and the difference between the original frequency and the offset frequency. Where the offset frequency is multiplied by an integer, the measurement period may be divided by that

10 integer.

It is possible for the sampling to be at fixed intervals. However, where the offset clock signal is frequency multiplied by an integer factor, it is

15 preferable that the sampling points are not regularly spaced by that integer factor, but are spaced by factors greater than or less than the integer factor. For example, if the integer is 4, then sampling may be at 3 and 5 intervals of the multiplied offset clock signal.

Thus a count is made of the occasions when there are more or less samplings, within the same bit than the predetermined number and the results of that count may be stored in a table whose size corresponds to the number of samples. The value stored in the table may increment and

20 decrement depending whether the count is above or below the predetermined number. The value stored in the count

25

WO 99/57842

PCT/GB99/01339

5

thus increments and decrements depending on the jitter, with the increments and decrements occurring as the sampling point is close to the absolute transition point of the bits. It is then possible to use the difference
5 between the maximum value counted and the minimum value counted, possibly with 1 subtracted, to be multiplied by the bit period to derived a coarse jitter value.

Moreover, if the number of samples between the first occurrence of the maximum value and the last of the
10 occurrence of the minimum value is determined, divided by the total number of samples, a fine jitter value may be determined. The jitter amplitude is then given by the sums of these two values.

It should be noted that where the offset clock is
15 multiplied by an integer value, both of these values may need to be divided by that integer to obtain a jitter value which corresponds to the peak-to-peak value of the deviation of the phase function of the measured signal relative to time. It can also be noted that such a
20 measurement is independent of bit rate, and independent of the shape of the binary signals being measured.

Thus, an aspect of the present invention may provide a system for measuring jitter in a digital signal having means for deriving a first clock signal from the digital
25 signal, the first clock signal being offset by a predetermined frequency from the digital signal and being

WO 99/57842

PCT/GB99/01339

6

smoothed, means for sampling the digital signal using the first clock signal, such that, in the absence of jitter and said offset by a predetermined frequency, there are a predetermined number of sampling times in each bit of said digital signal, means for detecting occasions when the number of sampling times in any bit is different from the predetermined number, means for counting such occasions, and means for deriving a measurement of jitter from that count.

10 Another aspect of the invention relates to a method of measuring jitter using such a system.

The present invention, because it involves digital sampling and counting, can be embodied in a device which makes less use of analog circuits than known jitter measurement systems, which makes embodiments of the invention easier to produce.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will now be described in detail, by way of example, with reference to the accompanying drawings, in which:

Fig. 1 shows a schematic block diagram of a jitter measurement device being an embodiment of the present invention;

Fig. 2 is a flow-chart of the sampling sequence in the embodiment of Fig. 1;

Fig. 3 is a block diagram of components of the

WO 99/57842

PCT/GB99/01339

7

jitter measurement device of Fig. 1;

Fig. 4 shows in more detail a part (RXBERT) of the diagram of Fig. 4;

Fig. 5 shows in more detail another part (RXJITTER) of the block diagram of Fig. 3;

Fig. 6 shows in more detail yet another part (TXBERT) of the block diagram of Fig. 3 and

Fig. 7 shows in more detail yet another part (TXJITTER) of the block diagram of Fig. 3.

10 DETAILED DESCRIPTION

Fig.1 shows schematically a jitter measurement device according to an embodiment of the present invention. In Fig.1, a digital pulse train signal which may contain jitter is fed to an input 100, and passed to a pattern clock converter 101. The converter 101 performs a similar function to that in the known systems, in that it converts the digital pulse train received at input 100, which may contain gaps in its pulse-train, into a continuous pulse-train with the same jitter as the original signal. That continuing pulse-train is then passed from the converter 101 to a clock frequency offset circuit 102. The offset circuit 102 determines the frequency of the pulse-train received from the converter 101 using known clock recovery techniques, but then is offset by a frequency which is a small proportion of the frequency of the pulses received.

WO 99/57842

PCT/GB99/01339

8

The offset clock pulses thus generated are passed to a phase locked loop (PLL) 103 with a long time constant. The loop has a phase comparator, a low pass filter and a voltage controlled oscillator, with the low pass filter having a very low cut off frequency it thus separates the relatively weak jitter component from the stronger modulation which is symmetric about the working frequency of the phase comparator. Therefore a slow- acting control voltage is produced which is used to regulate the oscillator to produce an average, constant phase. This generates a jitter-free pulse-train which can thus be used for a reference clock.

In this embodiment, the pulse-train thus generated is frequency multiplied by an integral factor. In the subsequent description, it will be assumed that integer factor is 4, but the embodiment is not limited to this. Thus, the output of the PLL 103 is a reference clock with a frequency multiplied by 4, and offset from the frequency of the digital signal received at the input 100 by a small frequency.

That reference clock is passed to a data sampler 104, and is used to sample the pulse-train received at the input 100. As can be seen from Fig.1, the pulse-train input at input 100 is passed to the data sampler 104, as well as to the convertor 101. The action of that data sampler 104 will now be described with reference to

WO 99/57842

PCT/GB99/01339

9

the flow chart of Fig.2.

As can be seen in Fig.2 a sampling step 110 is carried out, in which the pulse-train received at input 100 is sampled at a time determined by the reference clock signal from PLL 103. The logical level of the sample is then compared with that of the previous sample. There are four possibilities. In two of them, shown at steps 111 and 112, the sample is different from the previous sample, being either a change from logical zero to logical one (step 111) or a change from logical one to logical zero (step 112). In the other two alternatives, the sample is the same as the previous sample. In step 113, both are at logical one, and in step 114 both are at logical zero. From step 111, a three clock delay is imposed at step 115 and, assuming that the sampling operation has not yet been completed (step 116), processing returns to sampling step 110 for another sample. A similar procedure occurs at step 112, except that a five clock delay is imposed at step 117.

If there was no offsetting of the reference clock from the PLL 103, and the pulse-train received at input 100 had no jitter, then the effects of steps 111, 112, 115 and 117 would be for the sampling to switch across the logical transition of the pulse-train. If the sample was at logical level one, but had previously been a logical level zero, corresponding to step 111, the three

WO 99/57842

PCT/GB99/01339

10

clock delay would move the sampling point back to logical level zero. Similarly, if the sampling was at logical level zero and the previous sampling at logical level one, the five clock delay 117 would move the sampling point back to logical level one. Thus, without offset and without jitter, the processing would pass alternately via steps 111 and 112.

However, the offset circuit 102 output pulses to the PLL 103 which have an offset frequency relative to the pulse train received at input 100. Thus, and still assuming that there is no jitter in the pulse-train received at input 100, a sampling point which is initially spaced from the transition between logical levels would slowly move towards that transition, and would eventually reach it. As it crossed the transition, two sampling points would occur within the same pulse, and thus the step 113 would be triggered. From step 113, a three clock delay again occurs at step 118, but also a signal is passed to a counter step 119 which increments a counter (not shown in Fig. 2) by one. From counter step 119, processing again passes to the sampling step 110 via step 116. After the sampling point had crossed the transition, it would again return to the options envisaged by steps 111 and 112, the counter step 119 would not again be triggered.

Thus, in the absence of jitter and over a sampling

WO 99/57842

PCT/GB99/01339

11

period equal to the inverse of four times the clock
offset times the reference clock, counter step 119 would
be triggered only once. It can be observed from Fig. 2
that if the movement of the sampling point was within a
5 logical zero, indicated by step 114, a five clock
delaying step 120 would be triggered, and the counter
step 119 activated to decrement the counter. Thus, in
this case, the counter would count down once.

Now consider the effect of jitter in the pulse-train
10 received by sample 100. In the subsequent discussion,
the position of the transitions in the pulse-train in the
absence of jitter will be called the absolute transition
point, to distinguish from the actual transition point.
These two transition points differ due to jitter. Whilst
15 the sampling point is remote from the absolute transition
point, the processing envisaged by Fig.2 will pass
alternately via steps 111 and 112, assuming that the
magnitude of jitter is less than the pulse width of the
output of the PLL 103. However, as the sampling point
20 approaches the absolute transition point, due to the
offset of the reference clock, there is a possibility
that a sampling point will occur within the same pulse as
the previous sampling point, due to jitter. At that
time, either step 113 or step 114 is triggered, and the
25 counter step 119 either increments or decrements the
counter.

WO 99/57842

PCT/GB99/01339

12

Thus, over a part of the total sampling period, the counter step 119 may be triggered several times, depending on the magnitude of the jitter. It is this variation in the counter triggered by counting step 119 which enables jitter to be measured, as will now be described. Due to the jitter, the values stored by the counter triggered by counter step 119 will count up and down as steps 113 and 114 are triggered, if it is possible that the steps 113 and 114 may not be triggered alternately so that the counter step 119 may be triggered by the increment of step 118 more than once, before the counter step 119 is triggered by decrement step 120. It is also possible, of course, for the decrements at step 120 to be triggered more than once. As a result, over a measurement cycle, the counter may count up to a maximum value, and down to a minimum value. This is then used to determine the jitter as will now be described.

Referring again to Fig.1, the counter step 119 triggers an accumulator 105, which detects the counts and passes them to a store 106 to be stored in a table of a size corresponding to the measurement period. At the end of measurement period, triggered by end step 121, the difference between the maximum counts stored and the minimum counts stored, is determined. If there were no jitter, the minimum count would be zero (or minus one) and the maximum count would be one (or zero). If there

WO 99/57842

PCT/GB99/01339

13

is jitter, however, either the maximum count or the minimum count may differ from that. Therefore, 1 is subtracted from the difference between the maximum count and the minimum count and multiplied by a quarter of the bit period of the input pulse-train received at input 100. This one quarter multiple occurs because of the multiplication of the reference clock. This measurement gives a value known as "coarse jitter". Secondly, the count table accumulator 105 is scanned to find the first occurrence at the maximum value count, and the last occurrence at the minimum value count. The difference in position is determined, divided by four and divided by the table size, which is equalled with a number of times the sampler 110 will be triggered during a measurement cycle. This gives a value known as the fine jitter. The sum of the course and fine jitter measurements are the peak-to-peak amplitude of the phase jitter of the input signals.

It can be noted that the term "jitter amplitude" designates the peak-to-peak value of the deviation of the phase function relative to time. The jitter amplitude is measured relative to the length of a clock period, so that it is independent of the shape of the binary signal of the pulse-train. Also, it is independent of bit rate, because it is relative to the clock period, making it a normalised parameter. It is thus possible to use this

WO 99/57842

PCT/GB99/01339

14

value to compare jitter amplitudes.

Moreover, and as shown in Fig.1, the output of the table of store 106 may be passed to additional filter 107, or a discrete Fourier transform carried out on the count values stored. This enables the frequency content of the phase jitter of the input pulse-train received at input 100 to be determined.

In the embodiment described above, the PLL 103 multiplies the offset clock frequency generated by offset circuit 102 by 4. Other factors are useful, but it should be noted that this factor then determines the delays in steps 115, 117, 118 and 120 in Fig.2, and also the period of time of the measurement before end step 121 is reached. If, for example, a multiplier of 8 was used then steps 115 and 118 may have a seven clock delay, and steps 117 and 120 may have a nine clock delay. Moreover, the measurement period is then equal to the inverse of eight times the bit rate times the clock offset. Finally, when the fine jitter is measured, the subtraction of the table position of the first maximum value count from the table position of the last minimum count would then be divided by eight.

Fig. 3 is the top level functional block diagram for the entire jitter measurement device. It contains five main sections of circuitry, RX bit error rate testing (RX BERT) 10, TX bit error rate testing (TX BERT)

WO 99/57842

PCT/GB99/01339

15

11, RX jitter 12, TX jitter 13 and V40 interfacing circuitry 14. The configuration can generate transmit jitter and also measure the incoming receive jitter while carrying out a bit error rate test at the same time. The V40 circuitry 14 controls operation of the configuration via V40 interface circuitry.

In the device of Fig. 3, the signals considered are shown in Table 1.

Table 1

10	Signal Name	Description
15	AD(0:7)	This signal is the V40's databus and the lower 8 bits of its address bus multiplexed together. Data travels backwards and forwards along this bus between the configuration and the V40.
	AI(8:15)	This is the top 8 bits of the V40's address bus. It is an input to the configuration and indicates which address the V40 is accessing.

WO 99/57842

PCT/GB99/01339

16

	ASTB	This is the address/signal from the V40. It is high when the V40 is presenting its address on its external bus.
5	BEEPER	This signal oscillates at 2 megacycles per second and is divided in the smaller xilinx to form the beep signal.
	CLKIN	This signal comes from the oscillator on the PAX A board and oscillates at 12.288 megahertz.
10	CLKOUT	This signal is derived from signal CLKIN and oscillates at twice the frequency of CLKIN ie at 24.576 megahertz.
	COMP	This is the comparison output to the phase lock loop. It is used in the generation of the received jitter clock SCLK.
15	COUNT	This signal indicates when a received jitter phase change is to be counted. It is high for phase changes of both plus a quarter of an interval and minus a quarter of an interval.
20		The direction of the COUNT is controlled by the signal UP.
	CRCERR	This signal pulses whenever received CRC error happens.
25	D(0:7)	This is the internal databus to the configuration. It carries all the data from the V40 to and from the configuration.

WO 99/57842

PCT/GB99/01339

17

		It also carries the data which is stored in the V40's memory during DMA accesses.
5	DLTCLK	This signal oscillates at the same period as the transmit clock. It is fed to the Dallas chip to provide the transmit clock. It is also used to ensure the signals XTPOS and XTNEG have the right mark space ratio.
	DMAACK	This signal comes from the V40 and indicates that a DMA cycle is occurring.
10	DMARQ	This signal is generated by the configuration and is used to indicate to the V40 that a DMA request is pending.
	DOJIT	This signal goes high whenever a twelfth of a unit interval jitter hit is to be inserted into the transmit jitter. The transmit jitter is comprised of a twelfth of a unit interval hits.
15	ElCLK	This signal goes high once per received bit

WO 99/57842

PCT/GB99/01339

18

		in the RX jitter circuitry. Pulses on the ElCLK are counted and after every 8 counts a jitter result is DMA'd into the V40's memory.
5	FASERR	This signal pulses whenever the receiver detects a FAS error.
	HLDRQ	This signal is passed to the V40 and is held permanently low in this configuration.
10	INJERR	The V40 controls the signal and can pulse it in order to inject a bit error into the transmit Bert pattern.
	IOEN	This signal is used whenever the V40 carries out a IO operation.
	IORD	This signal goes low whenever the V40 is carrying out a IO read instruction.
15	IOWR	This signal goes low whenever the V40 carries out an IO write instruction.
	JCLKI	This signal is sourced from the jitter attenuator chip. It oscillates at the same frequency as the receive clock less
20		$1/(3 \times 2^{18})$ (approximately 1.27 parts per million). This signal is quadruple in frequency to form signal SCLK which is used
	JITAMP	to sample the received jitter.
25		This signal goes high whenever the V40 is writing to the jitter amplitude register on the transmit jitter circuitry.

WO 99/57842

PCT/GB99/01339

19

5	JMODI	The transmit jitter waveform. It indicates whether the jitter waveform is varying in phase or otherwise.
	JQ(0:2)	These signals are high whenever the V40 is writing to the transmit jitter frequency registers.
10	MNADDR	This signal is high wherever the received jitter circuitry has taken a jitter sample which is less than or equal to the previous minimum jitter sample. It causes the configuration to latch the DMA address of the next DMA cycle. At the end of the received jitter measurement the V40 reads this address to determine the received jitter.
15	MRD	This signal goes low whenever the V40 executes a memory read instruction.
20	MWRD	This signal goes low whenever the V40 executes a memory write instruction.
	MWRI	This signal goes low whenever the V40 executes a memory write instruction.
25	MXADDR	This signal goes high whenever the received jitter measurements is higher than any of the previous received jitter measurements. This signal is used to latch an address which is later used by the V40 to determine

WO 99/57842

PCT/GB99/01339

20

		the received jitter.
5	OFFCLK	This signal is the received clock offset by $-1/(3 \times 2^{16})$ (approximately -1.27 parts per million). This signal has quarter of a unit interval hits on it and is dejittered using the jitter attenuator chip.
	RSERI	This is similar to RSER.
10	RSTS	This signal from the Dallas chip goes high during time slot 16 of the E1 frame and is decoded to indicate phase or CRC errors.
	RXCKEN	This is the received clock enable signal for the RX Bert circuitry. It goes high for one CLKOUT period each received bit.
15	RXER	This signal is the data signal to the WG gate array.
	RFER	This signal from the Dallas chip is decoded to indicate FAS or CRC errors.
20	RFSYNC	This signal is used to synchronise the received time slot selection circuitry and also de-coded to indicate phase or CRC errors.
	RSER	This is the E1 data from the Dallas chip. It is passed to the WG gate ray to measure bit errors.
25	RSTS	This signal from the Dallas chip goes high during time slot 16 of the E1 frame and is

WO 99/57842

PCT/GB99/01339

21

	RECONEN	This signal is used to reconfigure the xilinx when the jitter test is complete.
5	RCHCLK	This signal from the Dallas chip is the channel clock for the E1 receive frame. It is de-coded to indicate FAS or CRC errors.
10	RDLCLK	This is the receive clock which is passed to the Dallas chip. It is similar to signal RXCKEN but is extended by one clock period to meet the Dallas chip specifications.
15	SCLK	This is the master clock used by the RX jitter circuitry. It oscillates at normally 8.192 megahertz, minus $1/(3 \times 2^{18})$ (approximately 1.27 parts per million). It is used to sample in incoming received data to detect jitter.
	SIGIN	This is the signal input to the 4046 phase up loop. It is used to quadruple the signal JCLKI to form signal SCLK.
20	SMP(0:7)	This signal is the raw sample jitter from the received jitter circuitry.
	STOPPED	This signal is controlled by the V40 and is driven high when the received jitter measurement is stopped.
25	PDLCLK	This signal is the 2 megabit transmit clock generated from the transmit BERT circuitry.

WO 99/57842

PCT/GB99/01339

22

5

TMO

10

TNEG

15

TPOS

TWO

20

TXBERT

25

TXBRTS

transmit jitter circuitry to insert a 12th of a unit interval jitter hit into the transmit clock. This signal prevents jitter hits from being inserted while the transmit bit is marking. This makes sure that the transmitted bits meet the pulse mask.

This signal originates in the Dallas chip and indicates the start of the transmit multiframe. It is used to synchronise the transmit time slot select circuitry.

This signal originates in the Dallas chip and together with signal TPOS forms the transmit E1 stream.

This signal originates in the Dallas chip and is used to generate the E1 stream.

This signal goes high when ever the received jitter is too much for the received jitter circuitry to cope with. The V40 can read whether this line as ever been high. If this is the case then the jitter measurement is discarded.

This signal goes high during time slots where bit error rate test signals are being transmitted.

This signal goes high whenever a transmitted PRBS bit is to be sent.

WO 99/57842

PCT/GB99/01339

23

	TXCKEN	This signal goes high for one CLKOUT period each transmit bit.
5	TXCLK	This is the signal pass to the counter timer chip to indicate the transmit bit rate.
	TSPDAT	This is the transmitted PRBS signal which is injected into the transmit data stream.
10	UP	This signal indicates the polarity of a receive jitter phase change and is used in conjunction with signal COUNT to accumulate the received jitter.
	V24RX	This signal is the received V24 data which is passed to the V40.
	V24RXD	This signal is the same as signal V24RX.
15	V24TX	This is the V24 data from the V40 transmitted out of the V24 port.
	V24TXD	This signal is the same as V24TX.
20	VCO	This signal comes from the 4046 phase lock loop. It is used in the process whereby signal JCLKI is quadruple in frequency to form signal SCLK.
	WGCLK	This signal is used to clock data into the WG gate array during bit error tests. The WG gate array then measures bit errors.
25	WGDATA	This is the data passed to the WG gate array from the receive BERT circuitry. It

WO 99/57842

PCT/GB99/01339

24

		is used to perform bit error rate tests on.
	WGERR	This signal originates in the WG gate array and indicates when a received bit error has occurred. It is passed to a counter timer
5		chip where bit errors are measured.
	XRNEG	This is the re-timed received E1 data which is passed to the Dallas chip.
	XRNEGI	This is the raw E1 data from the B board.
	XRBL5	This is the re-timed received E1 data which is passed to the Dallas chip.
10		
	XRPOSI	This signal is the raw received E1 data from the B board.
	XSM	This signal is XRNEGI re-timed to the clock CLKOUT. The received clock is recovered from this signal.
15		
	XSP	This is the signal XRPOSI re-timed to the clock CLKOUT. Along with signal XSM this signal is used to generate the received clock.
20		
	XSPU	This is the unbuffered received E1 data which is passed to the jitter detection circuitry. Jitter is detected on this signal.
25		
	XTNEG	This signal is passed to the B board and is used to generate the transmit E1 string.
	XTPOS	This signal is passed to the B board and is

WO 99/57842

PCT/GB99/01339

25

	used to generate the transmit E1 string.
--	--

The various components of the system of Fig. 3 will now be considered in more detail. Starting with the RX bit error rate testing circuitry (RX BERT) 10, the detailed structure of this circuitry is shown in more detail in Fig. 4. As can be seen, there are several circuit elements. The first is CLOCK GEN component 20 is used to double the frequency of the signal CLKIN. This forms a higher frequency clock CLKOUT which has a frequency of about $25\frac{1}{2}$ meahertz. The logic for this clock doubling is placed in a CLB map at position AA. This ensures that the logic is very close on the LCA to the global clock buffer GCLK. The circuit works by forming a signal CLKBUF which is identical to the signal CLKIN except delayed by a small amount of time. The clock CLKOUT is passed to a GETCLOCK component 21.

This GETCLOCK component 21 recovers the clock from the received E1 data to be used in the TX Bert circuitry. The raw incoming E1 data is sampled by the system clock CLKOUT and then the positive and negative streams are gated together to form signal RESET. This signal resets a four bit divided by twelve counter. This counter is then used to generate received blocks during times when there are no marks on the received data. CLB map in this

WO 99/57842

PCT/GB99/01339

26

drawing is used to try and squash as much logic as possible into the system. Thus, the GETCLOCK component 21 corresponds to the pattern clock converter 101 in Fig. 1.

5 The signals shown in Fig. 4 are then listed in Table 2.

Table 2

Signal Name	Description
10 CLKOUT CNT0 through to 15 CNT3	<p>This is the 24½ megahertz system clock.</p> <p>These four signals form a divide by twelve counter. It is divide by twelve as the received bit rate is a twelfth of the system clock. This counter is reset by the signal RESET. This occurs whenever a mark is received on the incoming data.</p>

WO 99/57842

PCT/GB99/01339

27

5		<p>During strings of 0's where there is no timing information on the received E1 data then this counter is used to generate the signal RXCKEN which is the received clock enable.</p>
10	RDLCLK	<p>This signal is generated for the Dallas chip. The signal RXCKEN is only one CLKOUT clock period wide. This is not a wide enough pulse to clock the Dallas chip so the extra signal RDLCLK is generated which is twice as long to clock the Dallas chip.</p>
15	RESET	<p>This signal pulse is high whenever a mark is received on the incoming E1 data and is used to synchronise the received counter.</p>

WO 99/57842

PCT/GB99/01339

28

	RNEG	This signal is fed to the Dallas chip and is the received negative E1 data.
5	RNEG0	This is the same signal as RNEG.
	RPOS	This is the received E1 positive pulses which are fed to the Dallas chip.
	RPOS0	This is the same signal as RPOS.
10	RXCKEN	This signal is generated in this block and is the received clock enable. This signal goes high for one CLKOUT period every single received bit.
15	RXP	This signal is used in combination with signal RXCKEN to generate the signal RDLCLK which is used to clock the Dallas chip.

The component 22 is used to generate the enables for the RX BERT circuitry. A patched signal USERTA goes high whenever the received data is to be passed to the WG gate array for PRBS testing. Two other CLB maps are used simply to compress the logic into the smallest space as possible. The block consists of an 8 bit

WO 99/57842

PCT/GB99/01339

29

counter which is formed by signals CNT0 through to CNT7. This counter is reset to 0 by the signal RFSYNC from a Dallas chip 23. This counter is then de-coded to form the time slot select for the received PRBS data. Note
5 that the high ordered 5 bits of the counter from signal CNT3 through to CNT7 are reset by the signal RFSYD. Again this technique is used to try and conserve space. The signal USERTS which is patched is then gated with the received clock enable to form the clock to the WG
10 gate array which is signal WGCLK.

As mentioned above, the TSSEL component 22 receives the signal RFSYNC from the Dallas ship 23. That signal is then passed to a G703ERRS component 24. This component 24 is used to generate the CRC and FAS error
15 signals. These signals are generated from gated signals from the Dallas chip 23. The signal CRC error goes low whenever the signals RF since and RFER are high simultaneously, likewise the signal FASERR goes low whenever the signals RCHCLK and RFER are high while the
20 signal RSTS is low.

Next the RX jitter circuit 12 will be considered in more detail. Its internal structure is shown in Fig.
5. Again, it has several circuit elements. The first is a CLOCKOFF component 30. The component 30 offsets
25 the incoming received E1 clock by minus $1/(3 \times 2^{18})$. (approximately 1.27 parts per million) before passing

WO 99/57842

PCT/GB99/01339 .

30

this clock to a Dallas jitter attenuator 31. It has a function which is used to divide the receive clock by 65,536. It also contains test functions and SLIPYREG which are used to offset the clock by adding single
5 periods of the clock CLKOUT every 65,536 received bits. Thus, the CLOCKOFF component 30 corresponds to the offset circuit 102 in Fig. 1.

The CLIPYCNT function uses a four bit counter which performs a divide by twelve operation. Bits zero and
10 one divide by three, and bits two and three divide by four, given a total of divide by twelve. The counter clock enabled by signal SLIPEN which goes high for one CLKOUT clock period every 65,536 received bits. The output of the counter is used to determine where in the
15 twelve bit shift register in function SLIPYREG the received clock is inserted. In this way twelfth of a unit interval phase changes are introduced into the received clock in order to offset it by minus 1.27 parts per million. The SLIPYREG function uses a twelve bit
20 shift register. It is used to inject slowly increasing twelfth of a unit interval jitter phase hits into received clock. Every 65,536 the point at which the received clock is injected into the shift register is moved closer to the beginning of the shift register.
25 The output of the shift register ie the offset clock is at the last twelfth tap. When finally the RX clock has

WO 99/57842

PCT/GB99/01339

31

been injected into the first bit of the shift register and it is time to access another twelfth of a unit interval phase shift. This received clock is discarded and then the received clock is then injected into the
5 end of the shift register. In this way the clock is offset. The MISSCNT function uses a linear feedback shift register counter. It consists of a sixteen bit shift register, of which four taps are fed back to the input. Other gates are used to detect when the shift
10 register counter has reached its terminal count. This forms signal HIGHNR which is the output .

Fig. 5 shows that the output JCLKI of the Dallas jitter attenuator 31 passes to a PLLSTUFF component 32. This PLLSTUFF component 32 is used to multiply the
15 signal JCLKI by four to form the jitter sample block SCLK. It does this by doubling the frequency using the phase lock loop and then doubling the frequency from the phase up loop by two using an edge detection method. The Dallas jitter attenuator jitter 31 acts a phase lock
20 loop which acts to remove the jitter component from the OFFCLK signal derived from the CLKOFF component 30. This function of the Dallas jitter attenuator 31, together with the PLLSTUFF component 32 thus form the PLL 103 of Fig. 1 which, as previously described,
25 produces a jitter-free pulse-train, and then multiplies that pulse-train by the integer factor of 4.

WO 99/57842

PCT/GB99/01339

32

A JITDET component 33 samples the incoming E1 data and from this measures the received jitter. It also recovers an E1 receive clock from the incoming E1 data stream. Thus, the JITDET component 33 forms the data
5 sampler 104 in Fig. 1. It receives the offset and multiplied clock signal from PLLSTUFF component 32, and also the incoming signal which is being sampled for jitter.

A JITCOUNT component 34 generates the 8 bit jitter
10 sample data. It consists of an 8 bit up/down counter which is enabled by the signal COUNT and the direct of the count is controlled by signal UP. The counter is set to value 80 HEX while the signal STOPPED is high. Notice that signal CNT7 is inverted before emerging from
15 this component 34. Thus the JITCOUNT component 34 forms the accumulator 105.

The output from this JICOUNT component 34 is signal SMP(0:7). That output SMP(0:7) passes to a JITOUT component 35. This component 35 is used to transfer
20 measured jitter into the V40's memory. This memory forms the sampler 106 of Fig. 1. It is also used to detect the amplitude of the received jitter. It does this by storing the addresses of the first time that a maximum valued jitter sample was stored and also the
25 address of where the last minimum value jitter sample was stored. The difference between these addresses

WO 99/57842

PCT/GB99/01339

33

ratio to the size of the whole DMA buffer gives an indication of the jitter amplitude. The current value of the sample jitter is stored in a shift register, along with the maximum value recorded up until now and
5 the minimum value recorded up until now. These are compared in a block called compare which indicates when bigger or smaller samples are received. These signals are processed to generate latches for addresses.

Next the TXBERT circuit 11 will be considered in
10 more detail with reference to Fig. 6. The TXBERT circuit 11 has a TXTSSEL component 40. The component 40 is used to generate the transmit enables for the transmit Bert data. It consists of an 8 bit counter formed by the signals CNT0 through to CNT7. This
15 counter is reset by the signal TMO which indicates the start of the transmit multiframe. The signal TMO comes from the Dallas chip 23. It is latched and gated to form signal TS since which directly resets the counter. The output of this counter is then decoded to form a
20 signal TXBERT. This signal goes high during which data is to be transmitted. In unframed mode this signal is patched permanently high. The signal is patched in the CLBTX time slot select. Note that signal TFSYNC directly resets the high five bits of the eight bit
25 counter whereas the low three bits of the counter are set to the value 001 by this signal. This ensures

WO 99/57842

PCT/GB99/01339

34

everything lines up with the timing of the TMO signal.

The output TXBERTS of the TXTSSEL component 41 passes to a TXPRBS component 41. This component 41 is used to generate the transmit PRBS Bert pattern. It consists of a 15 bit shift register formed by signals TAP0 through to TAP14. Various outputs from this shift register are then gated together and fed back to the input of shift register to generate a PRBS pattern. The CLBTXPRBS select is patched to select which taps are enabled. The CLB map TX polarity select is patched to determine the polarity of the transmitted PRBS data. Signal INJER is controlled by the V40 14. When this signal toggles high during the transmission of Bert data a bit error is injected into the transmitted data stream. This bit error signal is decoded to signal BERR which inverts the output of the PRBS shift register. Note the output of the shift register occurs from the eighth tap signal TAP7 although it could have come from any of the other taps if desired.

The TXJITTER circuit 13 will now be described with reference to Fig. 7. It has a TXCKEN component 50. This component 50 is used to generate the transmit clock. The transmit clock can be jittered under the influence of signals DOJIT and JMOD1. When signal DOJIT is high a twelfth of a unit interval phase hit is introduced into the transmit click if a polarity

WO 99/57842

PCT/GB99/01339

35

depending the state of signal JMOD1. These phase hit insertion happen during the time when the line is not marking except in high jitter situations.

Fig. 7 also shows a TXHDB3 component 42. This component 42 is used to encode the transmit data in a HDB3 format. Note it can be patched so that the transmit data is AMI. The configuration must do this encoding as the Dallas chip 23 can only encode for HDB3 during unframed transmission when the HDB3 coding is needed. For this reason the Dallas transmitter is always used to transmit AMI data. The CLB maps TX line code and TX framing are patched to enable AMI mode. In this mode, no extra violations are inserted into the transmit data.

Fig. 7 also shows a GRADREGO component 51. This component 51 contains the circuitry which is used to set the frequency of the transmitted jitter. It consists of a nineteen bit counter which is formed by signals JCNT(0:19) together with registers which are used to compare against this count value. The output INCAMP indicates when it is time to inject a twelfth of a unit jitter hit into the transmitted jitter waveform. The block EXTRACLK also enables fine tuning of the jitter frequency. The output INCAMP of the component 51 passes to an AMPREG component 52.

The component 51 is used to set the amplitude of

WO 99/57842

PCT/GB99/01339

36

the transmitted jitter. It consists of an eight bit
latch which the V40 14 can write to and an eight bit
counter which is compared to the contents of this latch
to indicate when the required jitter amplitude has been
5 reached.

The INCAMP signal also passes to a JITGEN component
57. This component is used to control the generation of
transmit jitter in the TX jitter generation circuitry.

It can be seen from the above discussion of Figs. 3
10 to 7 that the embodiment of Fig. 1 makes use primarily
of digital components. This makes embodiments of the
present invention easier and cheaper to produce. In the
embodiment of Fig. 1, the PLL circuit 103 needs to be an
analog circuit, but the fact that the PLL circuit 103
15 has a low time constant means that it is easy to produce
and is thus inexpensive.

In the above discussion, it is assumed that the
pulse-train received at input 100 is a co-directional
digital data signal, in which the clock information and
20 data are included together in one signal. The present
invention may also be applied to clock signals which are
not included with data, clocks still being recovered in
the same way as discussed above. Moreover, the present
invention may be used to investigate the jitter of an
25 analog signal, by converting that to a digital signal
before being input to input 100.

WO 99/57842

PCT/GB99/01339

37

CLAIMS

1. A method of measuring jitter in a digital signal comprising:
- forming an offset reference clock signal (101, 102, 103), being offset by a predetermined frequency amount from said digital signal;
- sampling (110) said digital signal at sampling times determined by said offset reference clock signal, such that, in the absence of jitter and said offset by a predetermined frequency, there are a predetermined number of sampling times in each bit of said digital signal;
- detecting (113, 114) occasions when the number of sampling times in any bit of said digital signal is different from said predetermined number;
- counting (119) said occasions over a predetermined time, and
- deriving (121) at least one measure of jitter from said counting of said occasions.
2. A method according to claim 1, wherein said offset reference clock signal is formed by extracting (101) a clock signal from said digital signal and offsetting (102) said clock signal by said predetermined frequency.
3. A method according to claim 2, further including smoothing (103) said offset reference clock signal.

WO 99/57842

PCT/GB99/01339

38

4. A method according to any one of said preceding claims, wherein said sampling times are determined by an integer multiple of the frequency of said offset reference clock signal.

5

5. A method according to claim 4, wherein said sampling the times are at clock bit intervals being plus and minus one of said integer multiple.

10

6. A method according to any one of the preceding claims, wherein the predetermined time is inversely proportional to the product of the bit rate of the digital signal and the predetermined frequency amount.

15

7. A method according to any one of the preceding claims, wherein one of said at least one measure of jitter is obtained by counting up one value for each of said occasions representing sampling times greater than the predetermined number within a bit, counting down one value for each of said occasions representing sampling times less than the predetermined number within a bit and determining the difference between the maximum count value and the minimum count value.

20

25

8. A method according to any one of the preceding claims, wherein one of said at least one measure of

WO 99/57842

PCT/GB99/01339

39

jitter is obtained by counting up one value for each of said occasions representing sampling times greater than the predetermined number within a bit, counting down one value for each of said occasions representing sampling
5 times less than the predetermined number within a bit and determining the time difference between the first occasion of the maximum count value and the last occasion of the minimum count value.

10 9. A method according to claim 8 as dependent on claim 4, wherein the time difference is divided by said integer multiple and said predetermined time.

15 10. An apparatus for measuring jitter in a digital signal comprising:

means (101, 102, 103) for forming an offset reference clock signal, which clock signal is offset by a predetermined frequency amount from said digital signal;

20 means (110) for sampling said digital signal at sampling times determined by said offset reference clock signal, such that, in the absence of jitter and said offset by a predetermined frequency, there are a predetermined number of sampling times in each bit of said digital signal;

25 means (112, 114) for detecting occasions when the number of sampling times in any bit of said digital

WO 99/57842

PCT/GB99/01339.

40

signal is different from said predetermined number; and

means (119) for counting said occasions over a predetermined time, and

means (121) for deriving at least one measure of
5 jitter from said means for counting of said occasions.

11. An apparatus according to claim 10, wherein said means for forming said offset reference clock signal comprises means (102) for extracting a clock signal from
10 said digital signal and means (102) for offsetting the clock signal by said predetermined frequency.

12. An apparatus according to claim 11, wherein said means for forming said offset reference clock signal
15 includes means (103) for smoothing said offset reference clock signal.

13. An apparatus according to any one of claims 10 to 12, wherein said means (121) for deriving one of said at
20 least one measure of jitter comprises means for counting up one value for each of said occasions representing sampling times greater than said predetermined number within a bit and for counting down one value for each of said occasions representing sampling times less than the
25 predetermined number within a bit and means for determining the difference between the maximum count

WO 99/57842

PCT/GB99/01339

41

value and the minimum count value.

14. An apparatus according to any one of claims 10 to 12, wherein said means (101) for deriving one of said at least one measure of jitter comprises means for counting up one value for each of said occasions representing sampling times greater than the predetermined number within a bit and for counting down one value for each of said occasions representing sampling times less than the predetermined number within a bit and means for determining the time difference between the first occasion of the maximum count value and the last occasion of the minimum count value.

15. An apparatus for measuring jitter in a digital signal comprising:

an offset unit (101, 102, 103) arranged to form an offset reference clock signal, being offset by a predetermined frequency amount from said digital signal;

a sampler (110) arranged to sample said digital signal at sampling times determined by said offset reference clock signal such that, in the absence of jitter and said offset by a predetermined frequency, there are a predetermined number of sampling times in each bit of said digital signal;

at least one detector (113, 114) arranged to detect

WO 99/57842

PCT/GB99/01339

42

occasions when the number of sampling times in any bit of said digital signal is different from said predetermined number;

a counter (119) arranged to count said occasions
5 over a predetermined time, and

an analyser (121) arranged to derive at least one measure of jitter from said counting of said occasions.

6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
21

1/8


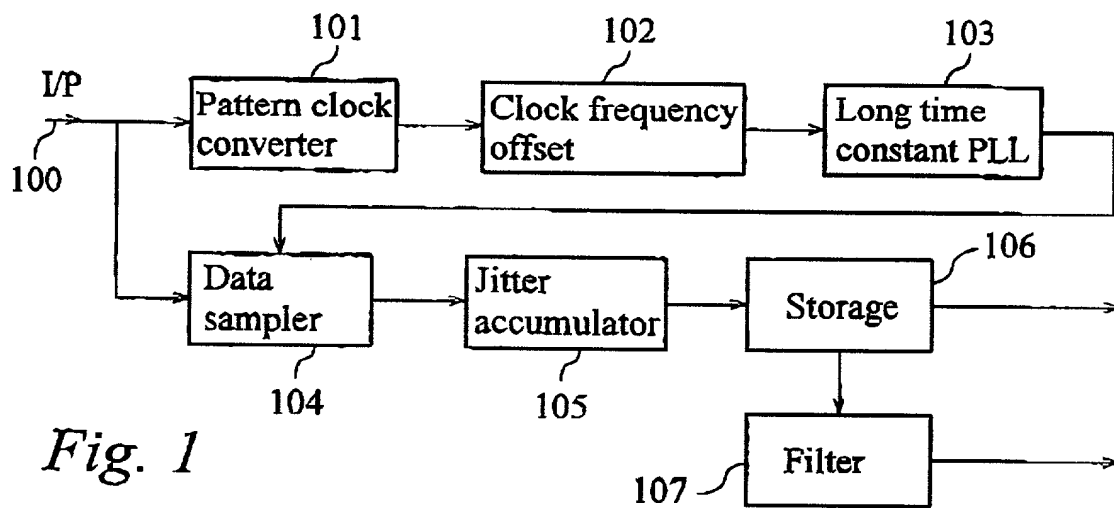


Fig. 1

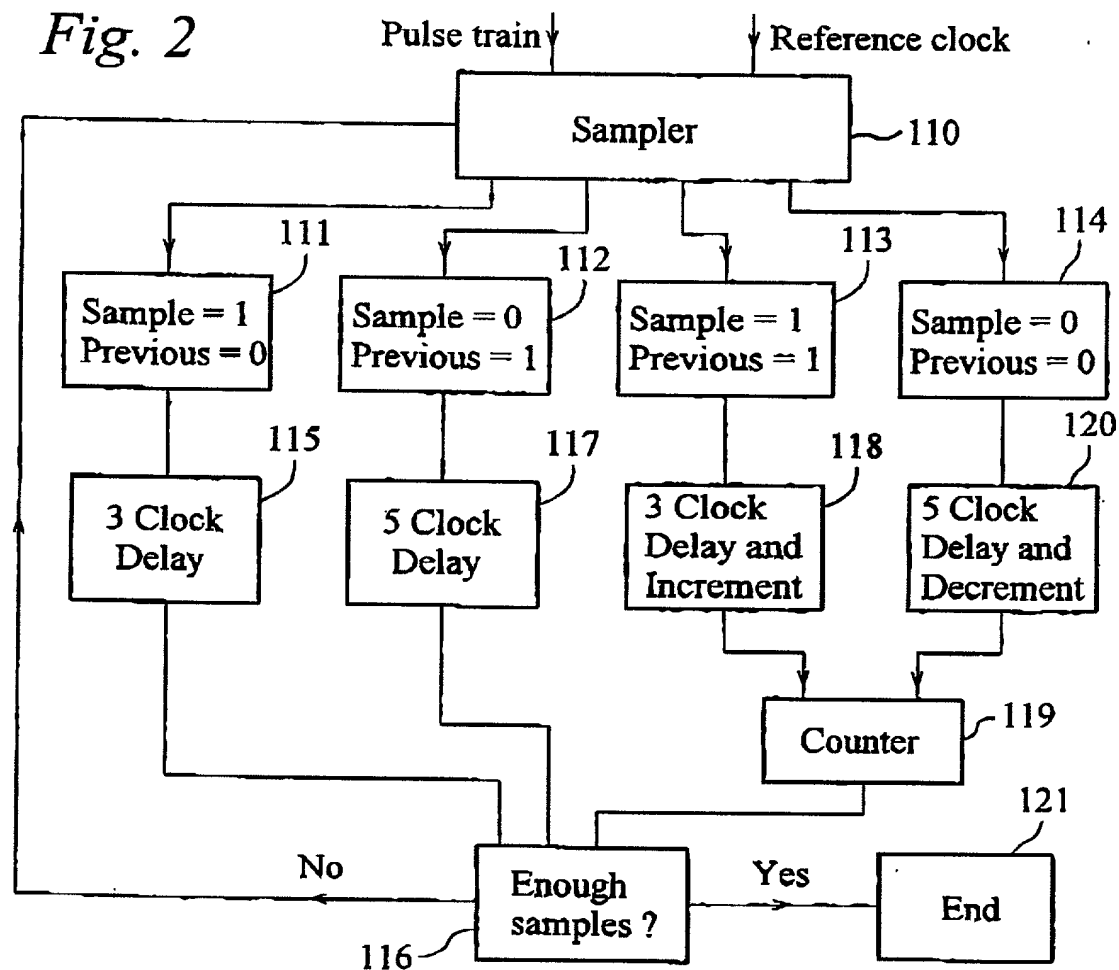

WO 99/57842

09/674444
PCT/GB99/01339

2/8


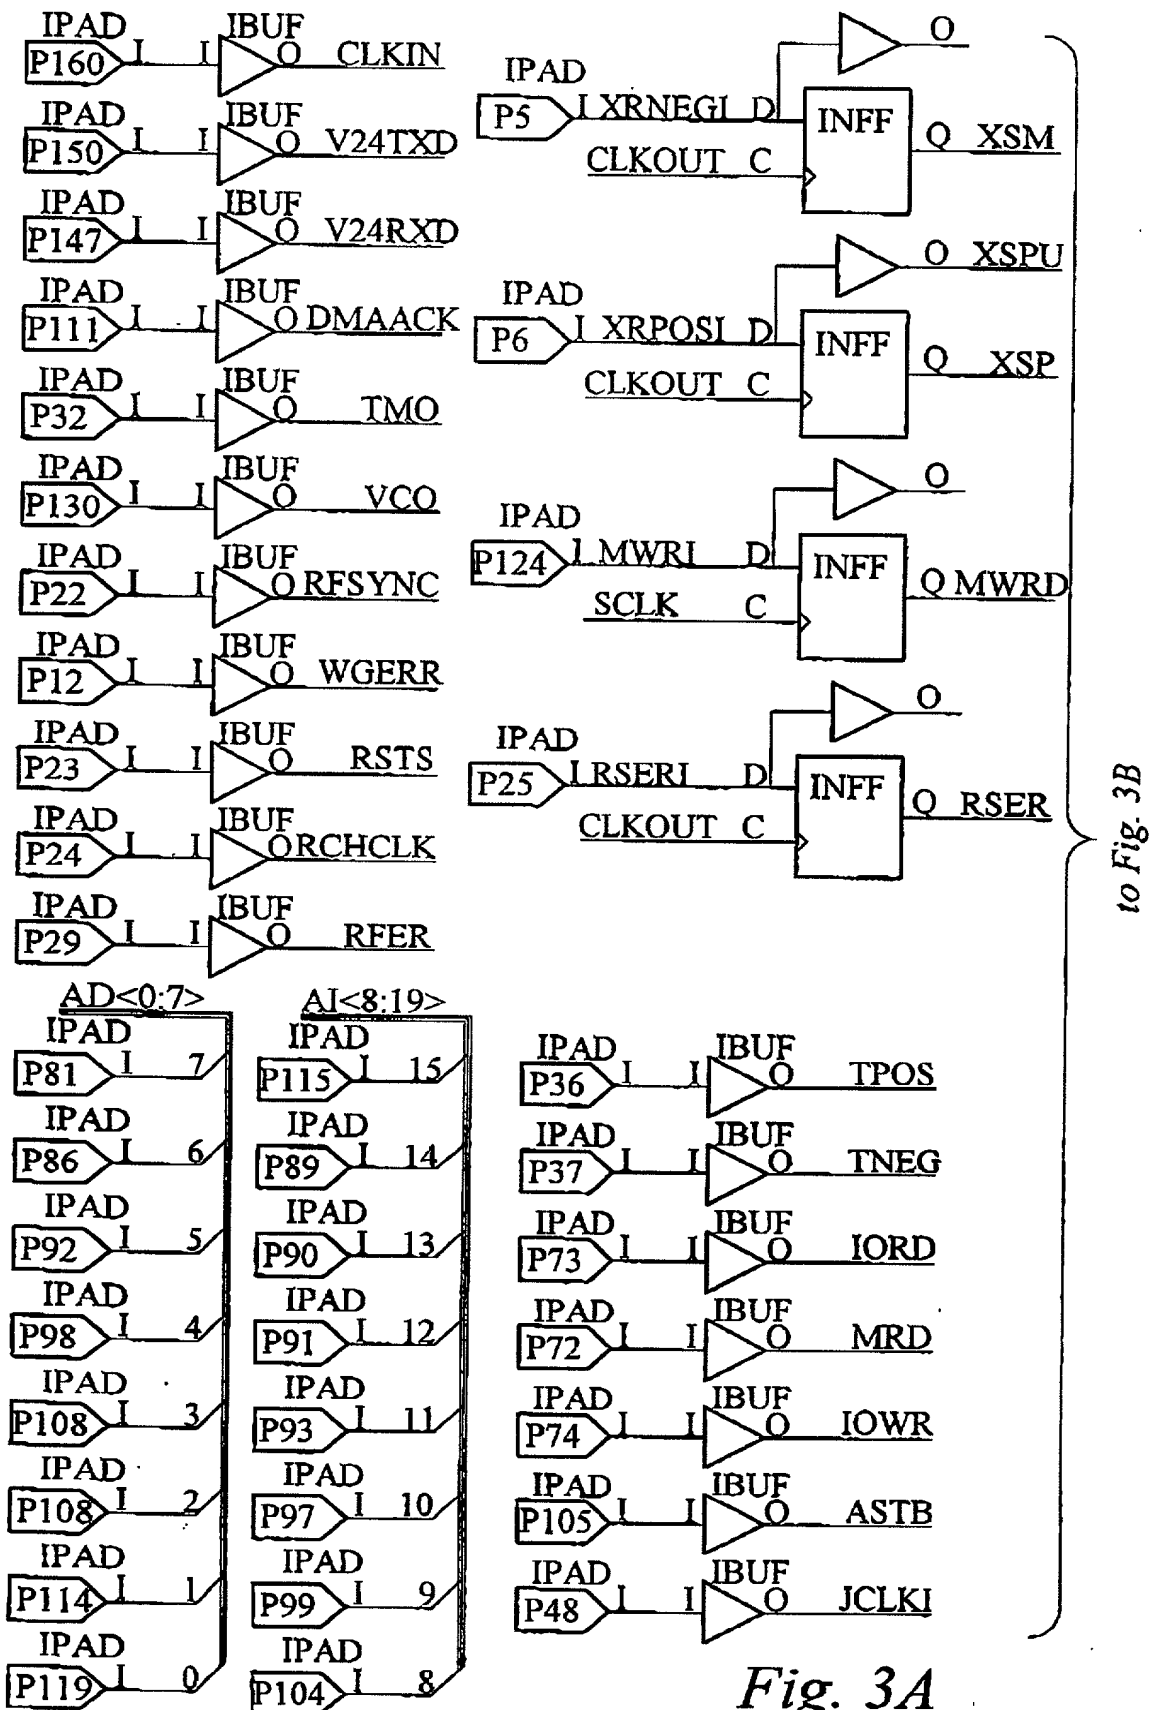


Fig. 3A

WO 99/57842

3/8

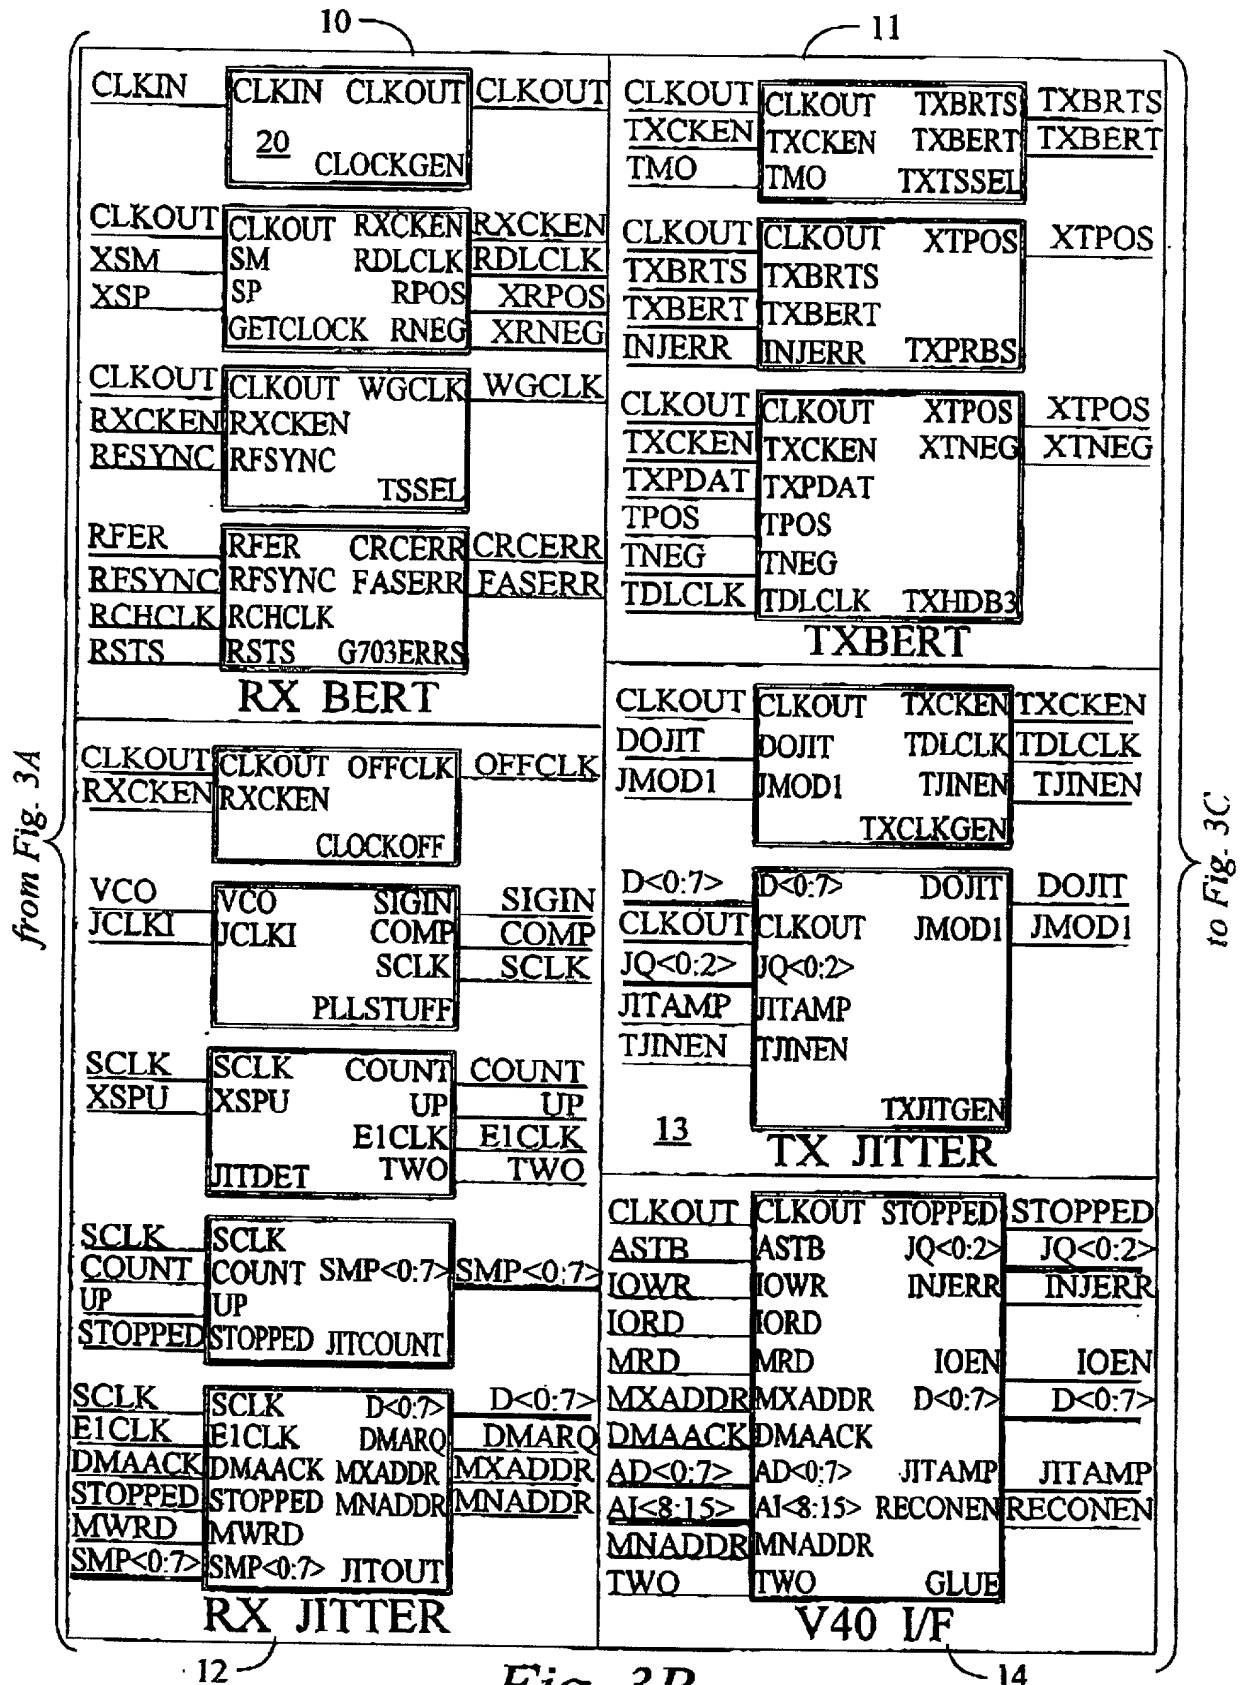


09/674444

PCT/GB99/01339

WO 99/57842

4/8

from Fig. 3B

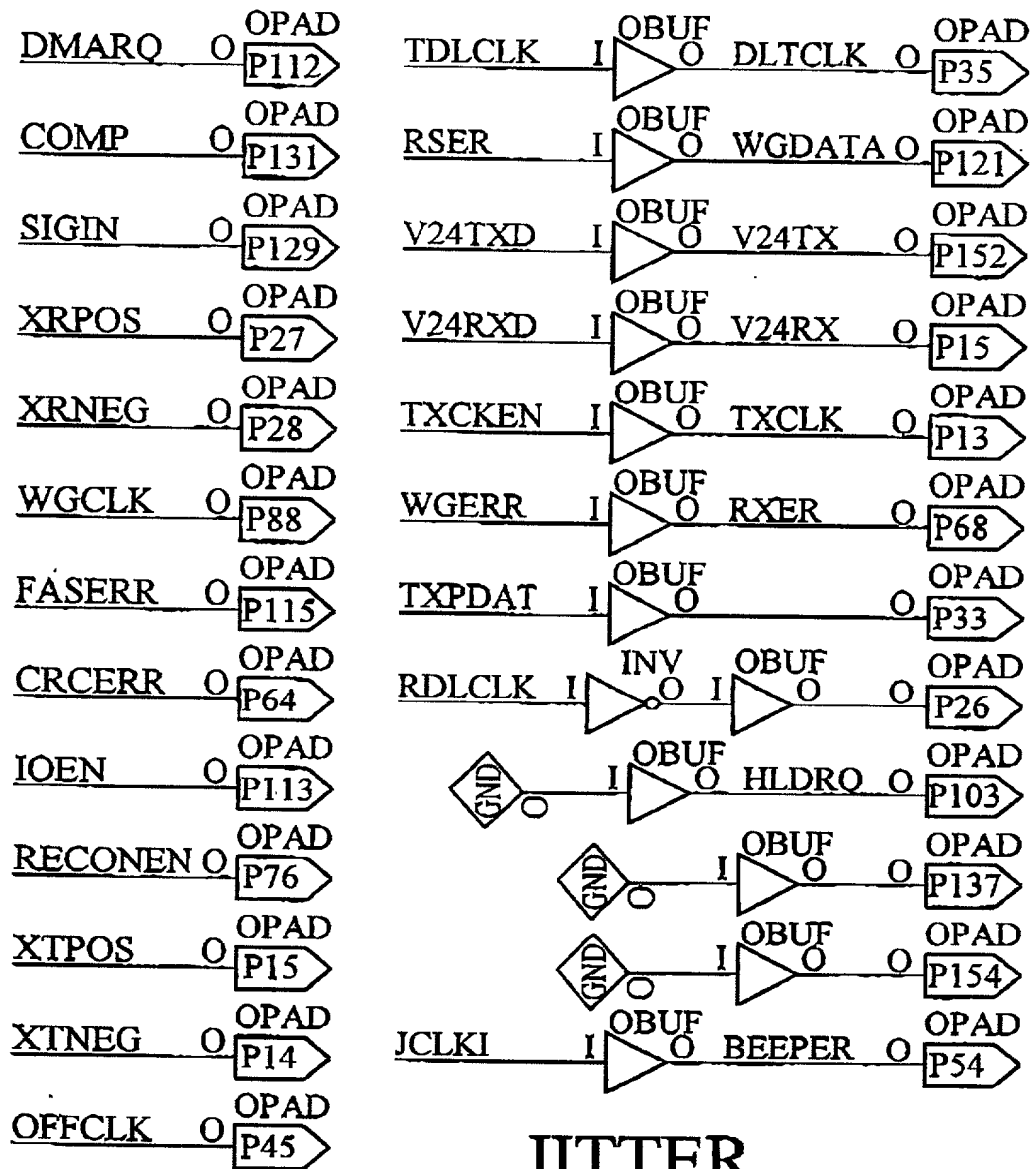

JITTER

Fig. 3C

WO 99/57842

5/8

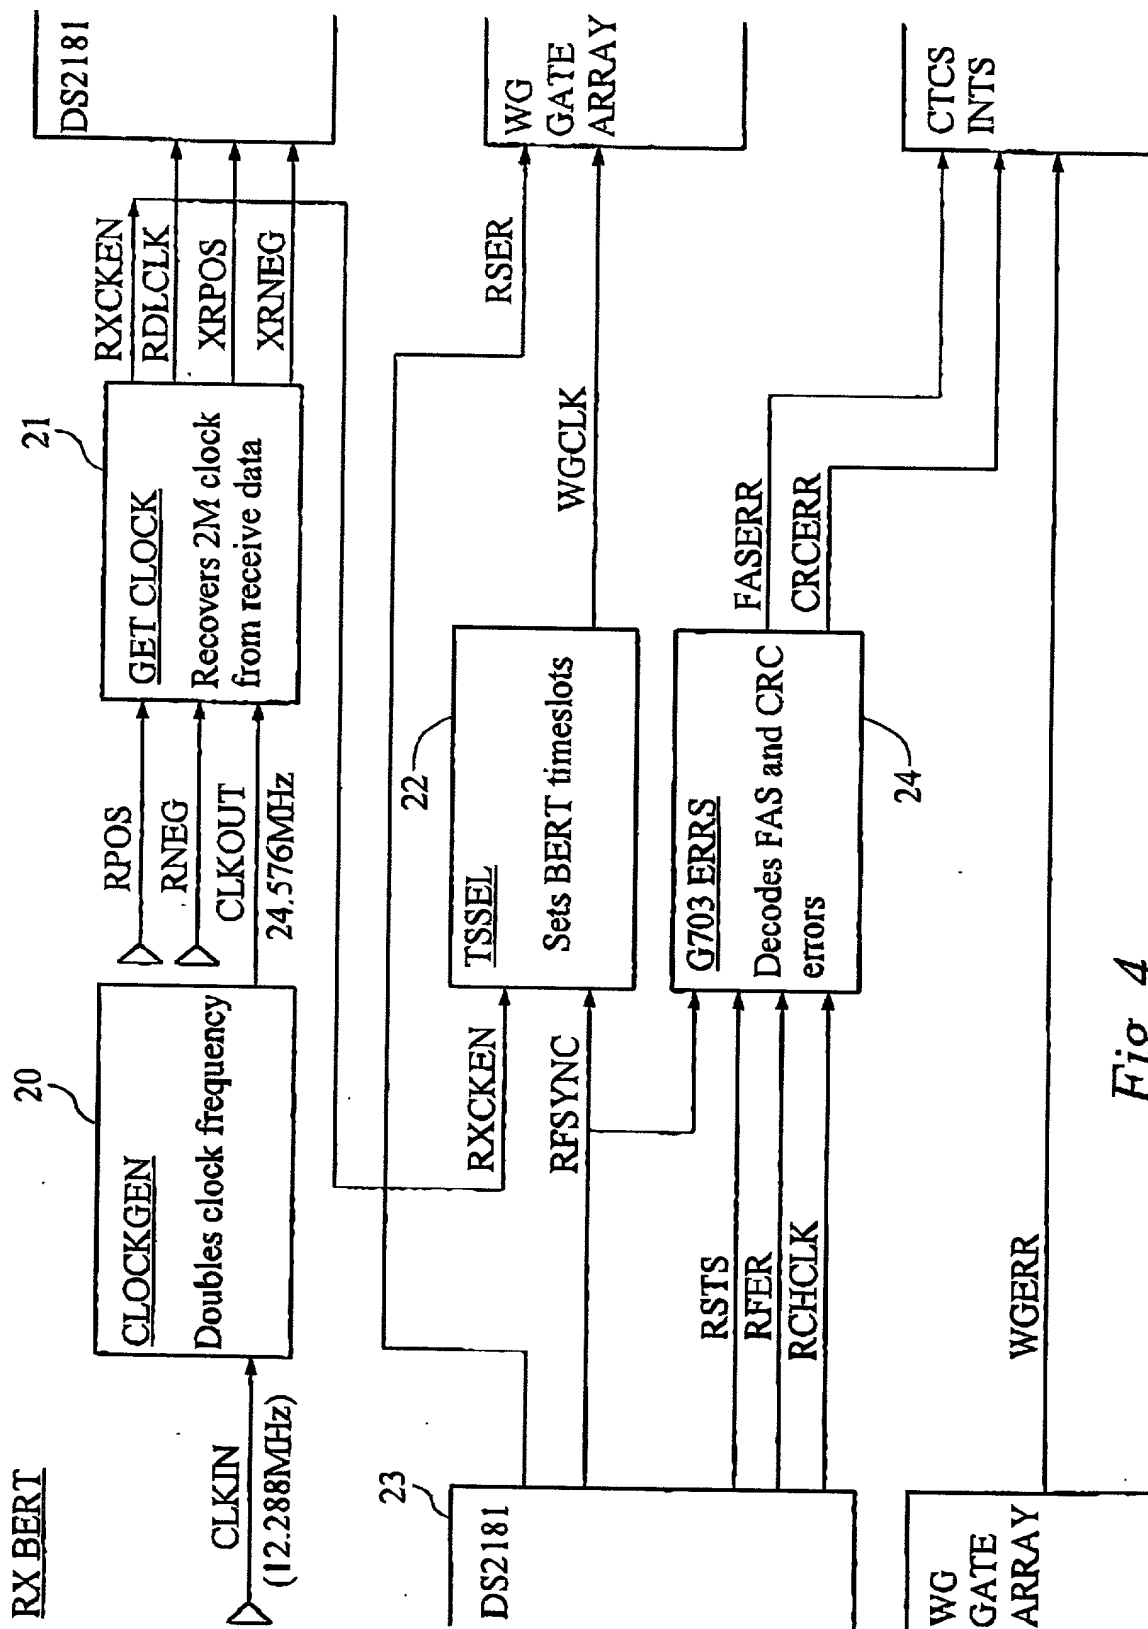


Fig. 4

WO 99/57842

09/674444
PCT/GB99/01339

6/8

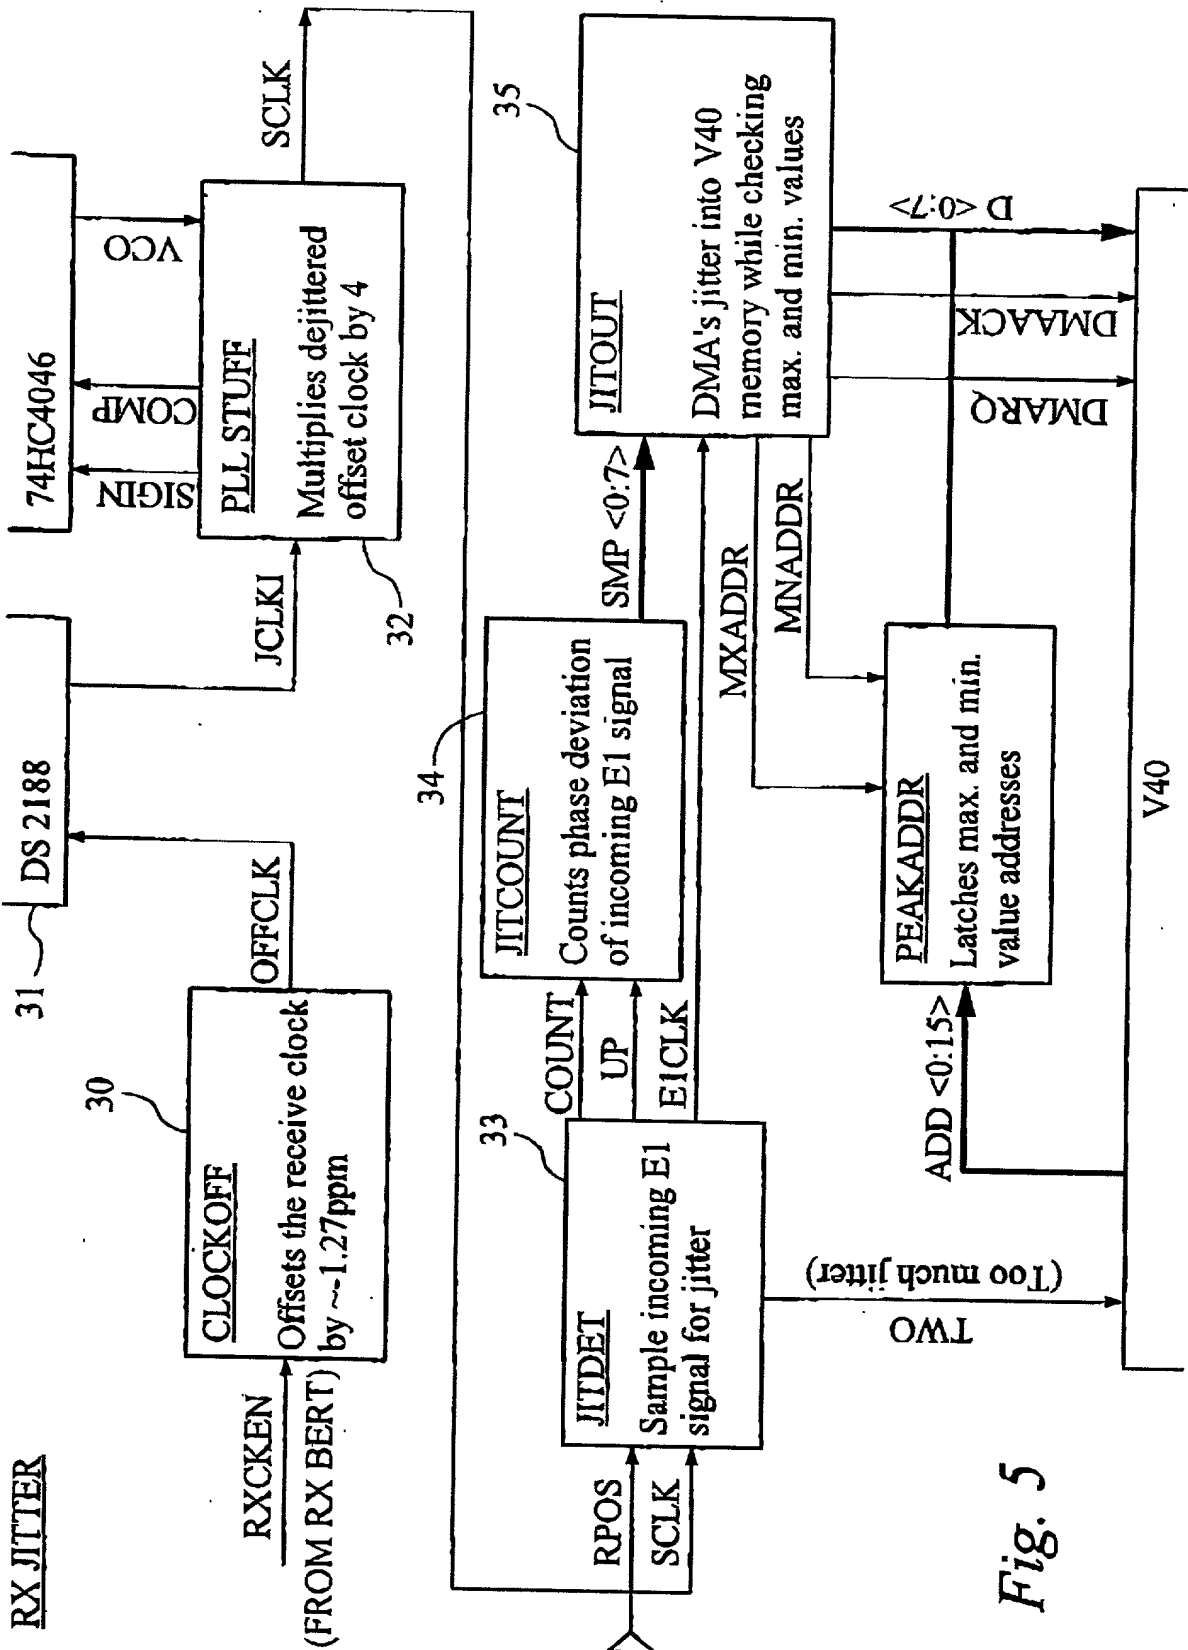


Fig. 5

7/8

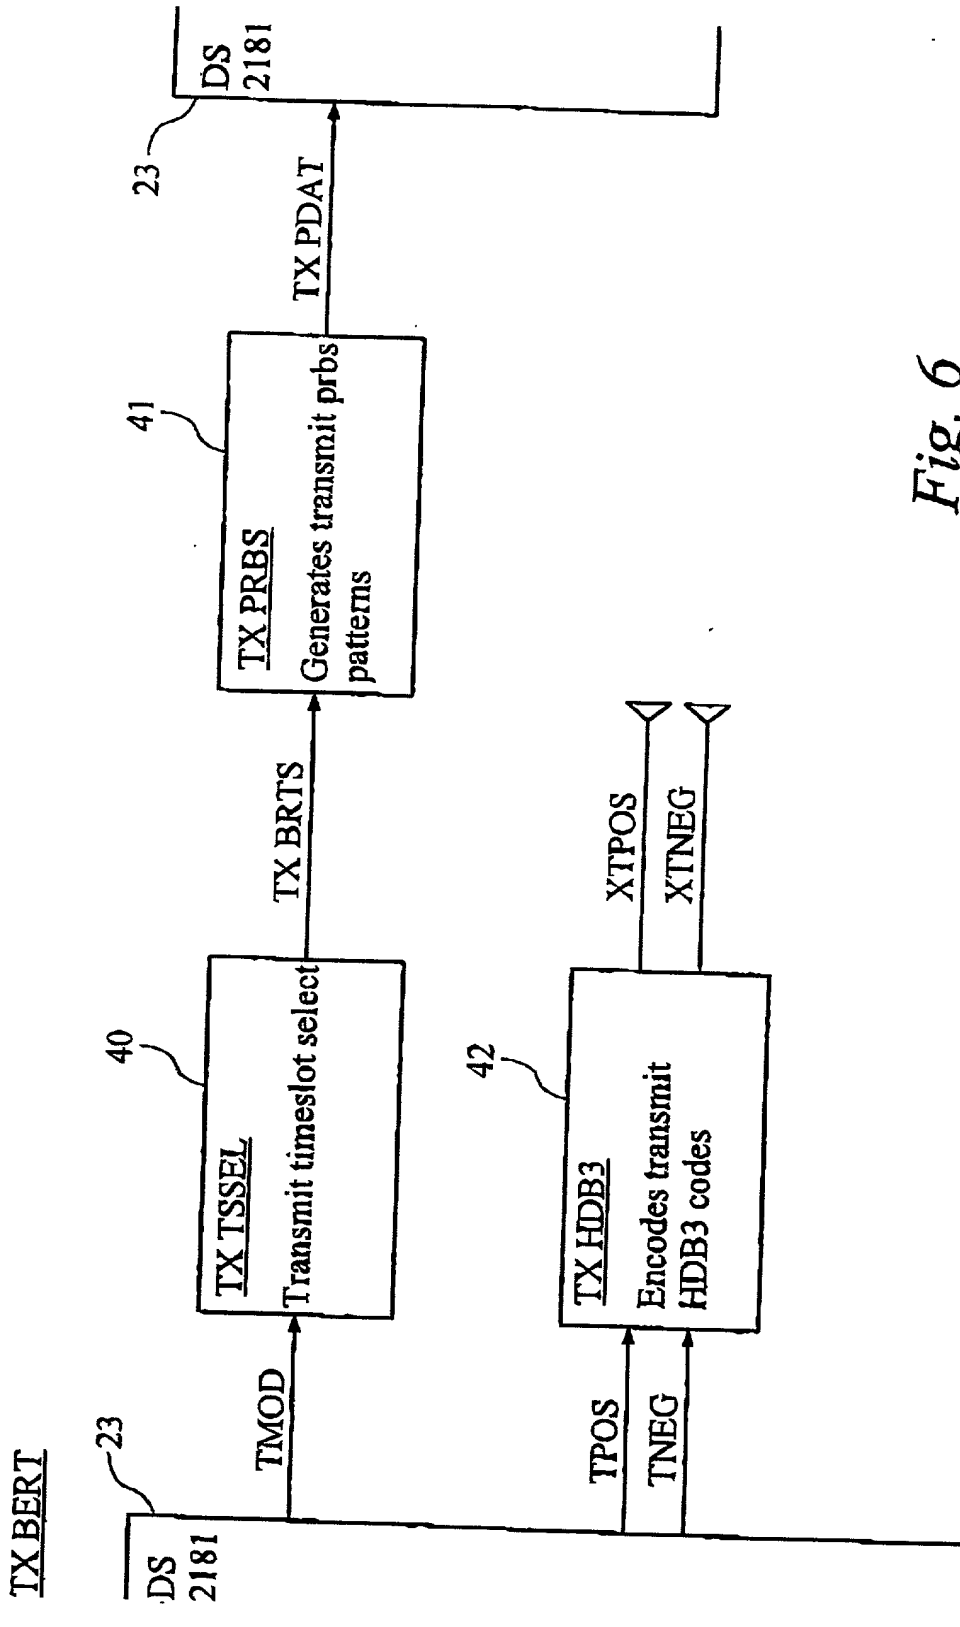


Fig. 6

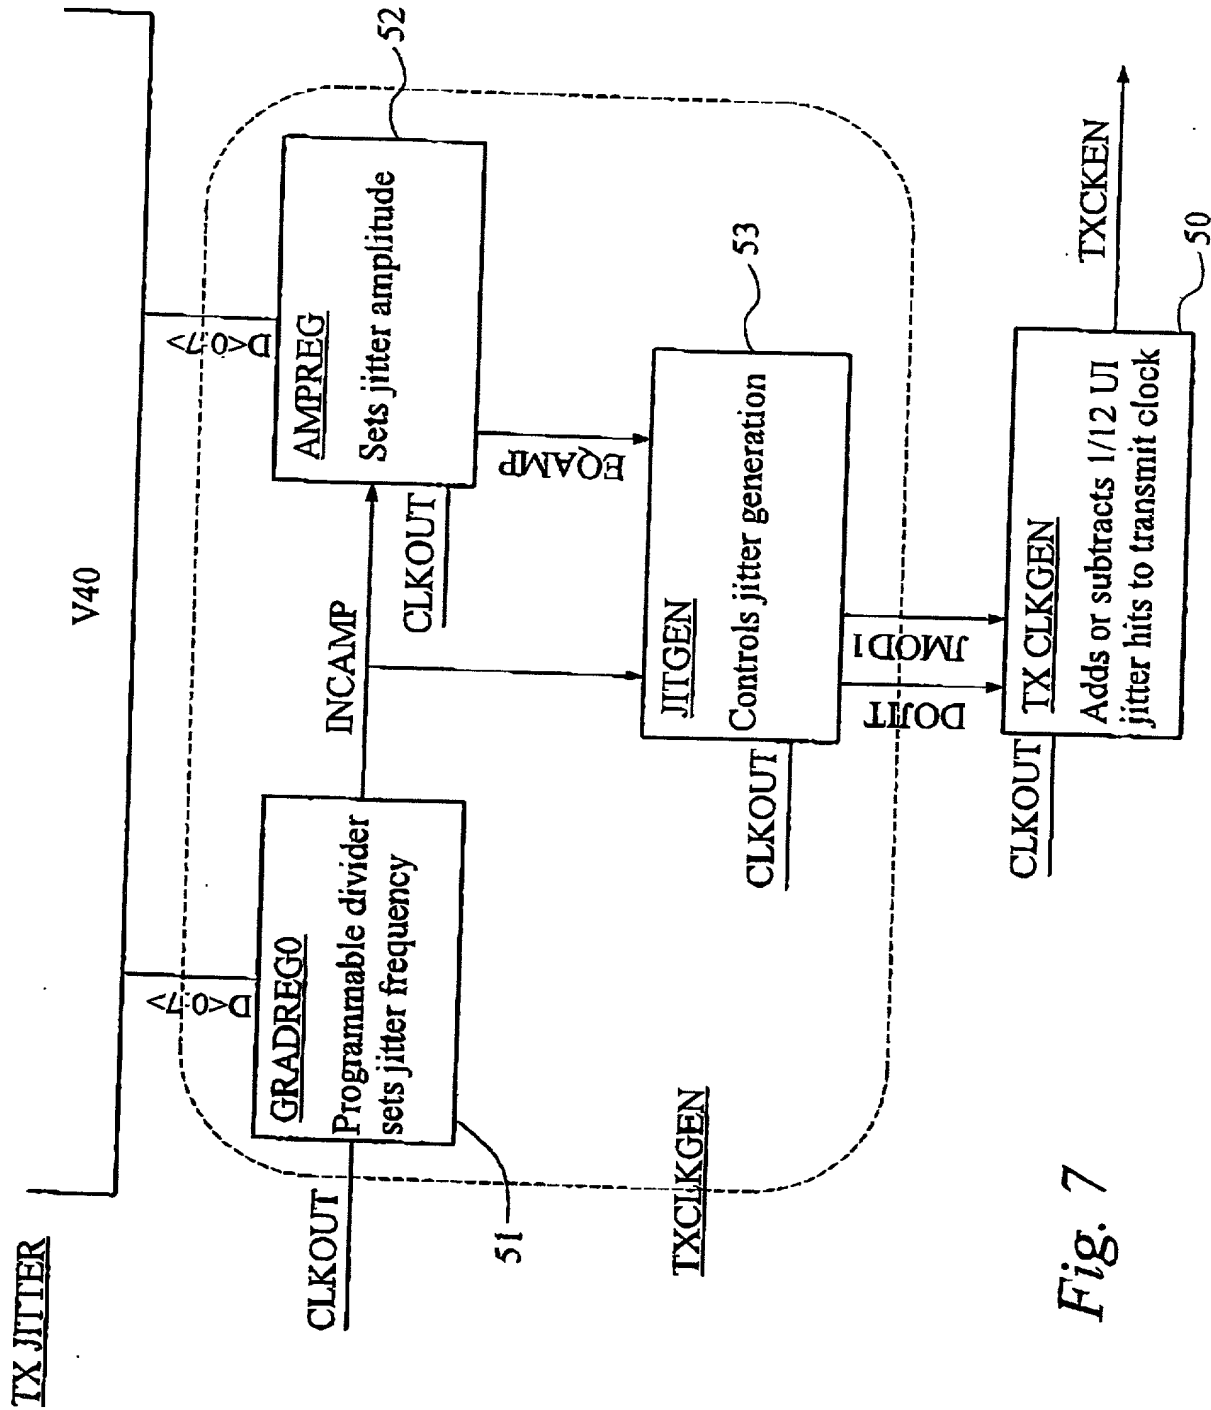


Fig. 7

Docket No.

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

the specification of which

(check one)



is attached hereto:



was filed on 24 April 1999 as United States Application No. or PCT International Application Number PCT/GB99/01339 and was amended on

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

9809450.1

Great Britain

1 May 1998

(Number)

(Country)

(Day/Month/Year Filed)



(Number)

(Country)

(Day/Month/Year Filed)



(Number)

(Country)

(Day/Month/Year Filed)



I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below::

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112. I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

4
 DARIN J. GIBBY Reg. No. 38,464
 LESLEY S. CRAIG Reg. No. 26,578
 CHAD S. HILYARD Reg. No. 40,647
 ROGER T. BARRETT Reg. No. P-14,599

Send Correspondence to: TOWNSEND AND TOWNSEND AND CREW LLP
1200 SEVENTEENTH STREET, SUITE 2700
DENVER, COLORADO 80202-5827, USA

Direct Telephone Calls to: *(name and telephone number)*

DARIN J. GIBBY TELEPHONE: 206-467-9600

1-2
 Full name of sole or first inventor

SYMON REUBEN BREWER

Sole or first inventor's signature

Date 6/10/2000

* Residence

Plymouth, Devon, United Kingdom

C BX

Citizenship

United Kingdom

Post Office Address

48, PEVERELL PARK ROAD, PEVERELL, PLYMOUTH, DEVON PL5 3LZ, United Kingdom

Full name of sole or first inventor

Sole or first inventor's

Date

Residence

Citizenship

Post Office Address